

# 91093FL

## 80/100/120/150 Watt Selectable Wattage & Color Temperature LED Flood Light



Job: \_\_\_\_\_  
Job Site: \_\_\_\_\_ State: \_\_\_\_\_ Client Name: \_\_\_\_\_  
Notes: \_\_\_\_\_ Approvals: \_\_\_\_\_ Date: \_\_\_\_\_

**Material:** Aluminum construction with integrated fins to maximize heat dissipation.

**Color:** Dark Bronze or Black.

**Preset Power:** 150 Watts

**Voltage:** 120-277 Volt standard.

**Selectable Colors:** 3000K; 4000K; 5000K

**Preset Color Temperature:** 5000K.

**Light Distribution:** Type 3 standard.

Type 4 and Type 5 options as special order.

**Photocell:** Photocell is optional.

**Dimming:** 0-10V Dimming Capable.

Dimming control not provided (field install).

**UL Listing:** UL Listed for Wet Locations.





**DLC Listing:** DLC Premium.

**IP Rating:** IP66

**EPA Rating:** 0.5

**Warranty:** 5 Years.

**Weight:** 9 lbs.

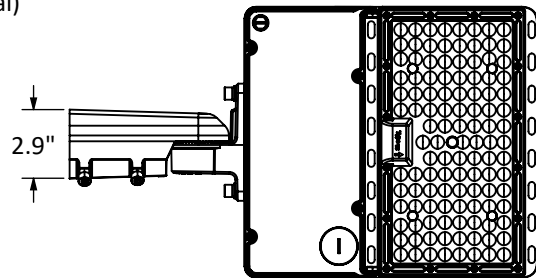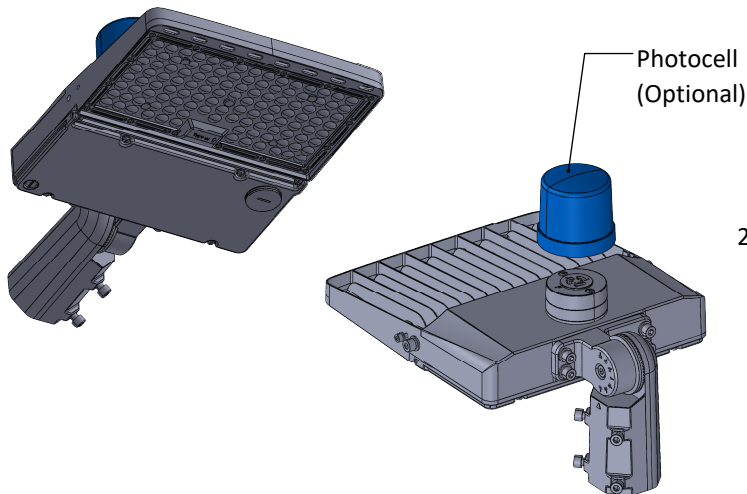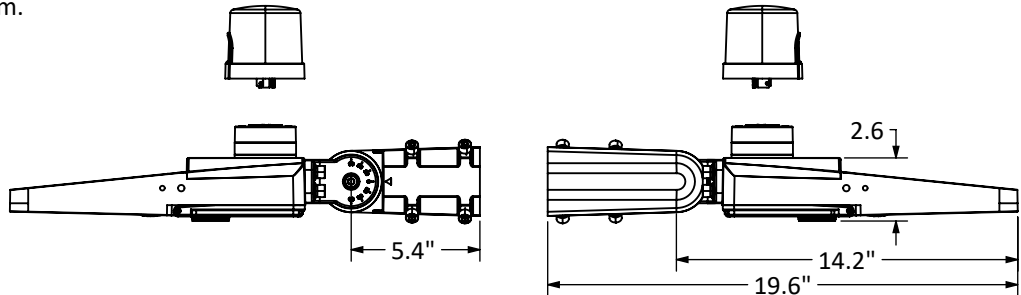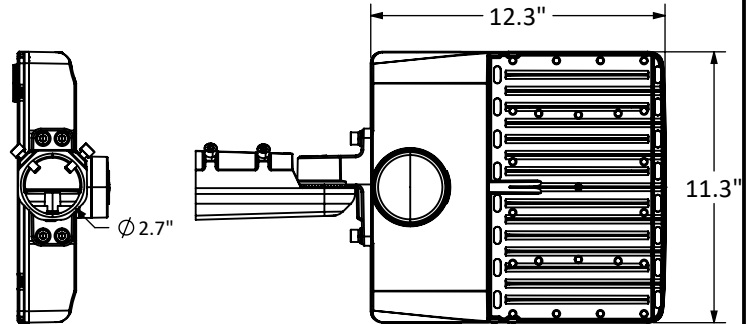

| POWER (W)   | 80                          | 100                         | 120                         | 150                         |
|-------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| AMPS        | 0.74 @ 120V/<br>0.33 @ 277V | 0.93 @ 120V/<br>0.40 @ 277V | 1.11 @ 120V/<br>0.48 @ 277V | 1.39 @ 120V/<br>0.60 @ 277V |
| LUMENS/WATT | 160                         |                             |                             |                             |
| LUMENS      | 12,800                      | 16,000                      | 19,200                      | 24,000                      |



**Disclaimer:** All dimensions and specifications are subject to change without any notice.