



# PK3002

# LED Light Pole Kit with Two 300 Watt LED Lights

Job: \_\_\_\_\_  
 Job Site: \_\_\_\_\_ State: \_\_\_\_\_ Client Name: \_\_\_\_\_  
 Notes: \_\_\_\_\_ Approvals: \_\_\_\_\_ Date: \_\_\_\_\_

**Commercial-grade LED Light Pole Assembly Includes:**

Square steel light pole, 2 LED lights complete with mounting brackets and hardware, set of anchor bolts and a base cover.

**Light Pole:**

**Pole Shaft:** Commercial grade steel with minimum yield strength of 55,000 psi.  
 20 ft. poles: 4" square X 11 gauge; 25 ft. poles: 4" square X 7 gauge;  
 30 ft poles: 5" square X 7 gauge.

**Pole Height:** Standard pole height is 20 ft. Optional heights are 25 ft. and 30 ft. Custom heights are also available.

**Anchor Bolts:** A set of 4 galvanized steel anchor bolts is provided.

Each anchor bolt includes 2 nuts and 2 washers.

**Bolt Circle:** 4"sq. Pole: 8-1/2" Bolt Circle (Slotted base for 8-11" Bolt Circle).

30 ft poles: 11" Bolt Circle (Slotted base for 10.5" - 12" Bolt Circle)

**Handhole:** Handhole is located 18" above the base plate for 20 ft and 25 ft pole.

21" above the base plate for 30 ft pole.

Handhole cover size: 3" X 6" for 20 and 25 ft. poles. 3" X 5" for 30 ft. poles.

**Color:** Dark Bronze

**Base Cover:** ABS Plastic base cover with rivets.

**LED Fixture:**

**Material:** Aluminum construction with integrated fins to maximize heat dissipation.

**Color:** Dark Bronze.

**Power:** 300 Watts

**Lumens:** 41,000.

**Voltage:** 120-277 Volt standard. 200-480 Volt option as special order.

**Color Temperature:** 5000K standard. 4000K and 3000K options as special order.

**Light Distribution:** Type 3 standard. Type 4 option as special order.

**Photocell:** Optional Twist/Lock photocell.

**Dimming:** 0-10V Dimming Capable. Dimming control not provided (field install).

**UL Listing:** UL Listed for Wet Locations.


**DLC Listing:** DLC Premium.

**IP Rating:** IP65

**Life Expectancy:** 100,000 hours (L70)

**Warranty:** 5 Years.

**Weight:** 19 lbs.

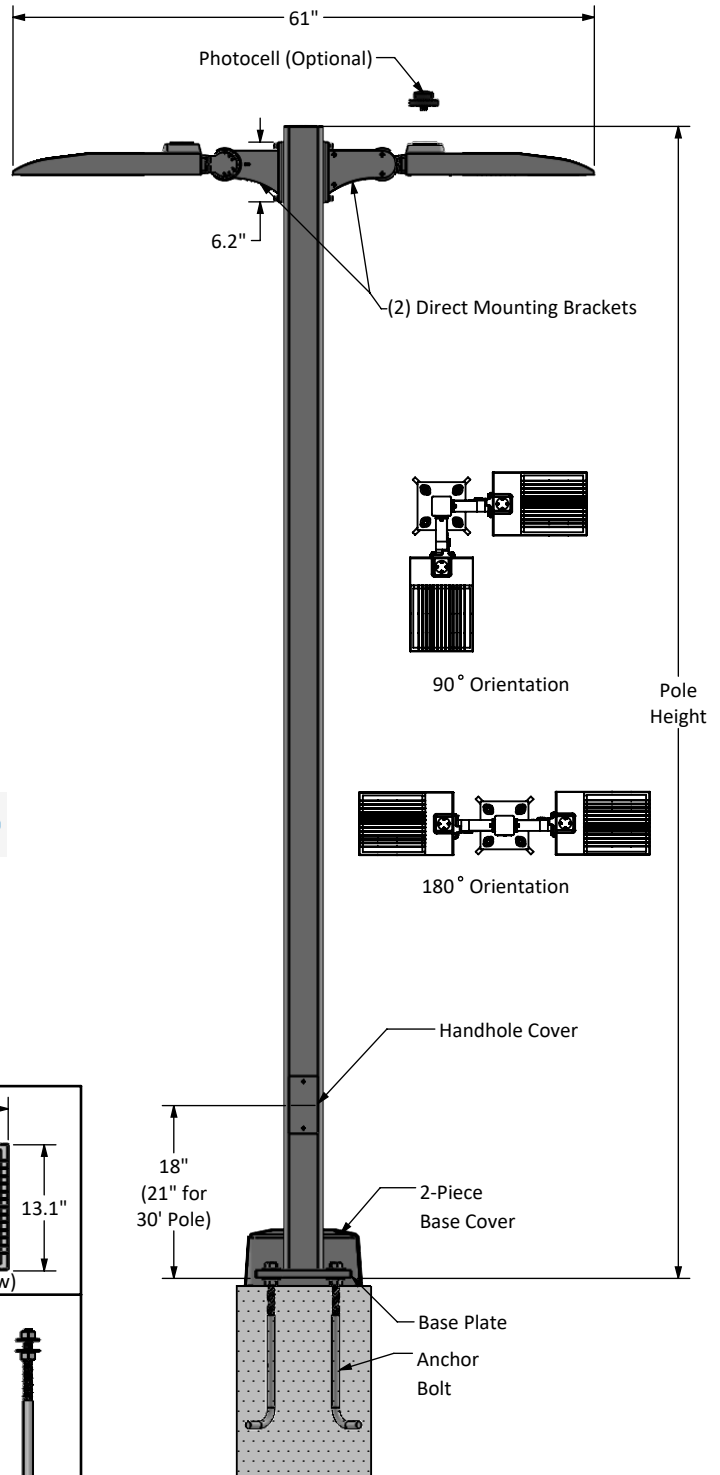

Total Power (Watts)	Total Lumens	Total Amps		Max Wind Rating	
		120V	277V	20 ft, 25 ft	30 ft
2x300=600	2x41,000=82,000	2x2.5=5.0	2x1.08=2.16	140 mph	120 mph

28.1" (width)  
2.5" (height)

LED Fixture (Bottom View)

19.6" (width)  
13.1" (height)

LED Fixture (Top View)

Base Plate

Bolt Circle

Pole Height	Base Plate Dim	Slot Dim	Bolt Circle
20 ft, 25 ft	10" Sq. x 0.75"	0.98" x 2.5"	8.5"
30 ft	11" Sq. x 1"	1.15" x 1.9"	11.0"

Anchor Bolt

Pole Height	Anchor Bolt
20 ft	3/4"x17"x3"
25 ft	3/4"x30"x3"
30 ft	1"x36"x4"

**Disclaimer:** All dimensions and specifications are subject to change without any notice. Light Pole Foundation should be designed by an engineer familiar with local soil and wind conditions as well as local code where the light pole will be installed.